

SABRE[®]

ARCHITECTURAL

770 DOOR CLOSER

SUITABLE FOR TIMBER, METAL AND ALUMINIUM DOORS

- Size 2/3/4 position adjustable
- Suits door widths from 850mm to 1100mm
- Door weight 40kg to 80kg
- 180° opening
- Non handed
- Adjustable back check
- Parallel arm bracket (optional extra)
- Track arm application available



Fire Rated



www.sabre.com.au

770 DOOR CLOSER

APPLICATIONS

The 770 Door Closer was designed for the budget conscious in mind. Non handed and easy to install the 770 Door Closer includes features such as adjustable back check, latching and closing speeds. Parallel arm applications are possible with the addition of the parallel arm bracket


which is available separately.

Standard Finishes: SIL = Silver, SSS = Satin Stainless Steel, PSS = Polished Stainless Steel

STANDARD ARM

PULL SIDE


Provided the site conditions allow, an opening angle of 180° is possible with this installation. Please note that using measurements A or B will provide different spring strengths.

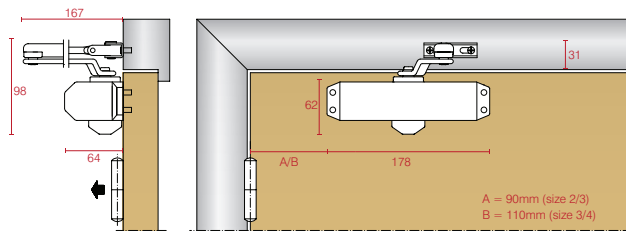

TRACK ARM

PULL SIDE


Provided the site conditions allow, an opening angle of 160° is possible with this installation. Please note that using this installation a size 3 spring strength is achieved.

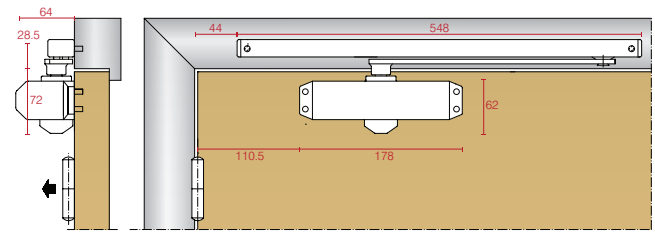

STANDARD TRANSOM

PULL SIDE


Provided the site conditions allow, an opening angle of 180° is possible with this installation. Please note that using measurements A or B will provide different spring strengths.

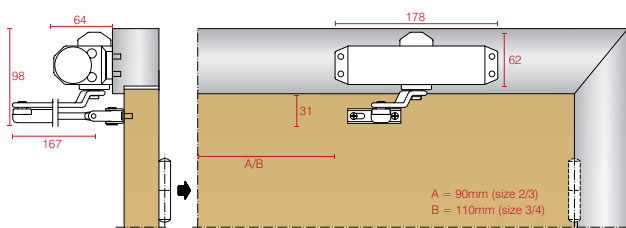

TRACK ARM TRANSOM

PULL SIDE


Provided the site conditions allow, an opening angle of 160° is possible with this installation. Please note that using this installation a size 3 spring strength is achieved.

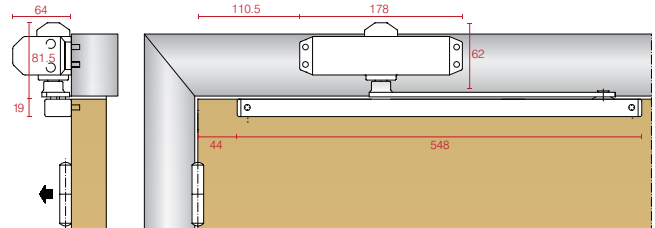

PARALLEL ARM

PUSH SIDE


Provided the site conditions allow, an opening angle of 180° is possible with this installation. Please note that using this installation a size 3 spring strength is achieved.

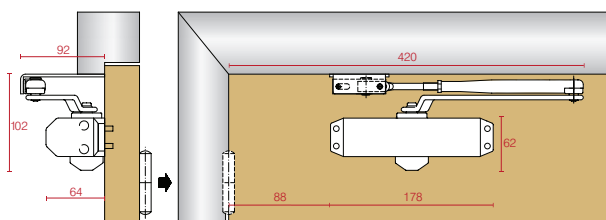

TRACK ARM

PUSH SIDE

Provided the site conditions allow, an opening angle of 120° is possible with this installation. Please note that using this installation a size 3 spring strength is achieved.

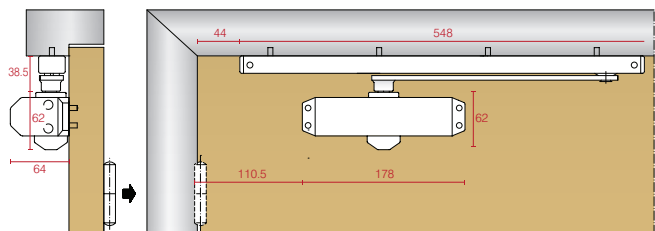

ACCESSORIES

